



Axiom V

NURC

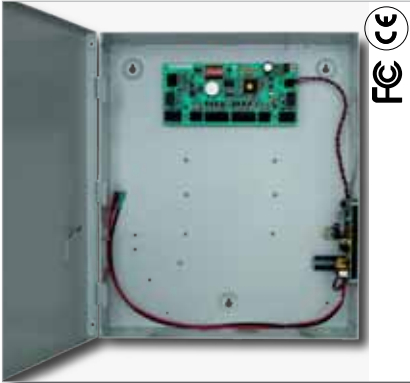

FC CE

NURC-2002 includes one NURC-2000 controller installed in an ENCL-1-PS enclosure as shown above

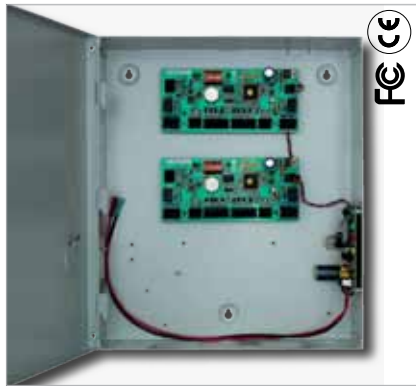

FC CE

NURC-2004 includes two NURC-2000 controllers installed in an ENCL-1-PS enclosure as shown above

NURC Panels per NC-100 :	4
NC-100 required :	Yes
D-Net Communications to NC-100 :	Supervised RS-485
Speed :	38.4 Kbps
Distance :	4,000ft (1,200m)
Cable Type :	18AWG, 2 conductor, twisted, stranded, shielded
Access Points (Readers/Keypads) :	2 with LED and Buzzer control
Distance :	Max 500ft (150m)
Cable Type :	20 - 22 AWG, 6 or 8 conductor, stranded, shielded
Simultaneous Card Formats per Panel :	5, All Wiegand compatible readers supported
Programmable Supervised Inputs :	4
Input Supervision :	Four state monitoring (1 or 2 resistors)
Distance :	Max 1,000ft (300m)
Cable Type :	20 - 22 AWG, 2 conductor
Programmable Outputs :	2 SPDT 5A @ 30VDC, dry contacts 2 Electronic drivers, 12VDC max, 100 mA
Output mode :	Programmable Fail Safe/Fail Secure
Power Requirements :	16.5VAC, 40VA transformer (not included)
Recommended Back-up Battery :	12V, 7 AH lead acid or gel cell (not included)



19" Rackmount !



NURC-2000 Controller is designed for mounting in the standard ENCL-1 enclosure. LEDs and DIP switch bank are mounted on the front of the controller board.



NURC-2001 Controller is designed for mounting on a standard R2U rack mount plate. LEDs and DIP switch bank are mounted on the back of the controller board.



NURC-2005 includes two URC-2001 controllers installed on a R2U 19" rack mount plate as shown above.



© RBH Access Technologies, Inc. 2008

Head Office

RBH Access Technologies, Inc.

2 Automatic Drive, Suite 108
Brampton, ON Canada
L6S 6K8

Tel. +1-905-790-1515
Fax. +1-905-790-3680

info@rbh-access.com

www.rbh-access.com

Europe

ARAS & RBH Security Group Ltd.

F3 Enterprise Way, Vale Business Park
Evesham, Worcestershire UK
WR11 6GS

Tel. +44(0)-1386-42810
Fax. +44(0)-1386-42811

info@aras-rbh.com

www.aras-rbh.com

USA

RBH USA, Inc.

60 Whitney Rd., Suite 14
Mahwah, NJ 07430

Tel. 877-251-3550
Fax. 201-891-3420

usa.info@rbh-access.com

www.rbh-access.com